




RHU2AW THRU RHU2MW

Surface Mount Ultrafast Recovery Rectifier

Features

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- High efficiency
- Lead free in comply with EU RoHS 2011/65/EU directives



Mechanical Data

- Case:SMAW
- Terminal:Leads solderable per MIL-STD-750 Method 2026
- Polarity:Color band denotes cathode end
- Mounting Position:Any



Ordering Information

Part Number	Shipping	Reel
RHU2AW THR RHU2MW	8000PCS Tape&Reel	13 inches

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

Parameter	Symbol	RHU2AW	RHU2BW	RHU2DW	RHU2GW	RHU2JW	RHU2KW	RHU2MW	Unit
	Marking	U2AW	U2BW	U2DW	U2GW	U2JW	U2KW	U2MW	
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at T _c = 125 °C	I _{F(AV)}	2							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I _{FSM}	50							A
Maximum Instantaneous Forward Voltage at 2 A	V _F	1.0			1.3	1.65			V
Maximum DC Reverse Current T _a = 25 °C at Rated DC Blocking Voltage T _a =125 °C	I _R	5 100							μA
Maximum Reverse Recovery Time (Note1)	T _{RR}	50				75			ns
Typical Thermal Resistance (Note2)	R _{θJA}	60							°C/W
Typical Junction Capacitance at VR=4V, f=1MHz	C _J	20							pF
Operating and Storage Temperature Range	T _J , T _{STG}	-55 ~ +150							°C

Note:(1) Measured with $I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$, $I_{rr} = 0.25\text{ A}$.

(2) P.C.B. mounted with 2.0" × 2.0" (5cm × 5cm) copper pad areas.



Characteristic Curves

FIG. 1 FORWARD CURRENT DERATING CURVE

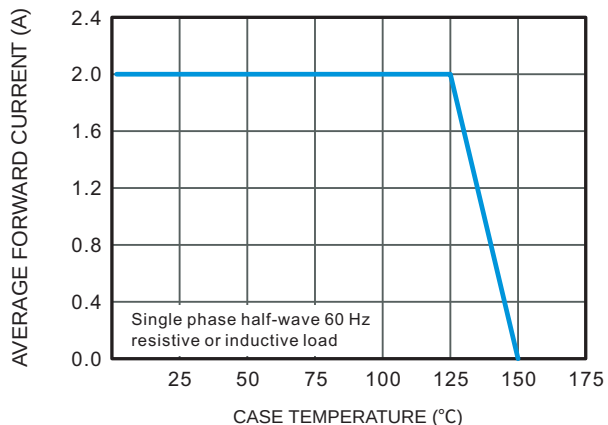


FIG. 2 TYPICAL REVERSE CHARACTERISTICS

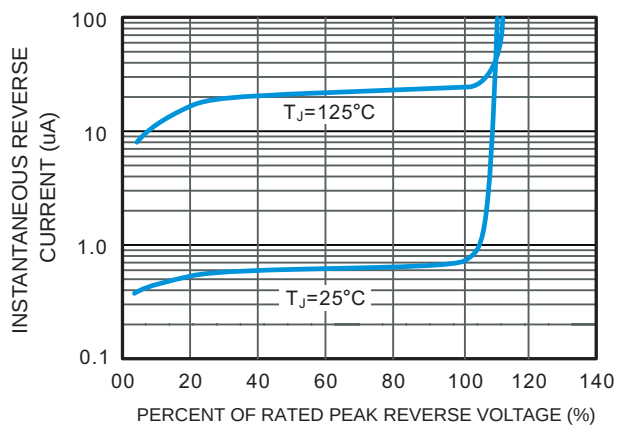


FIG. 3 TYPICAL FORWARD CHARACTERISTICS



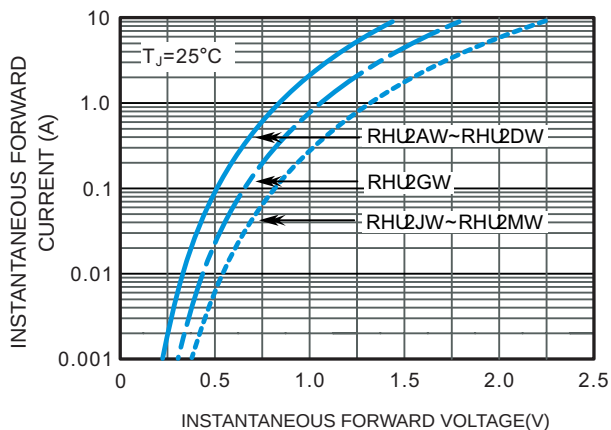


FIG. 4 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT




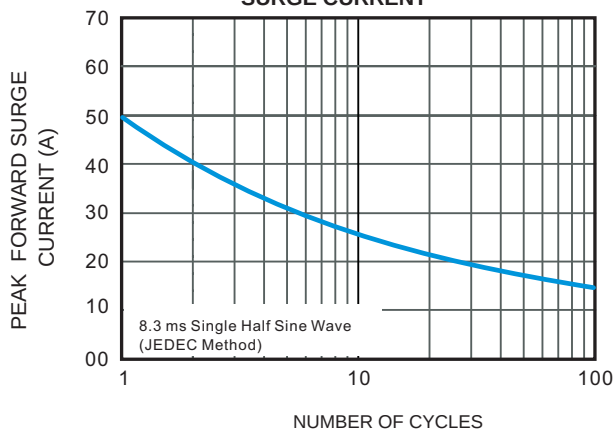

Package Outline

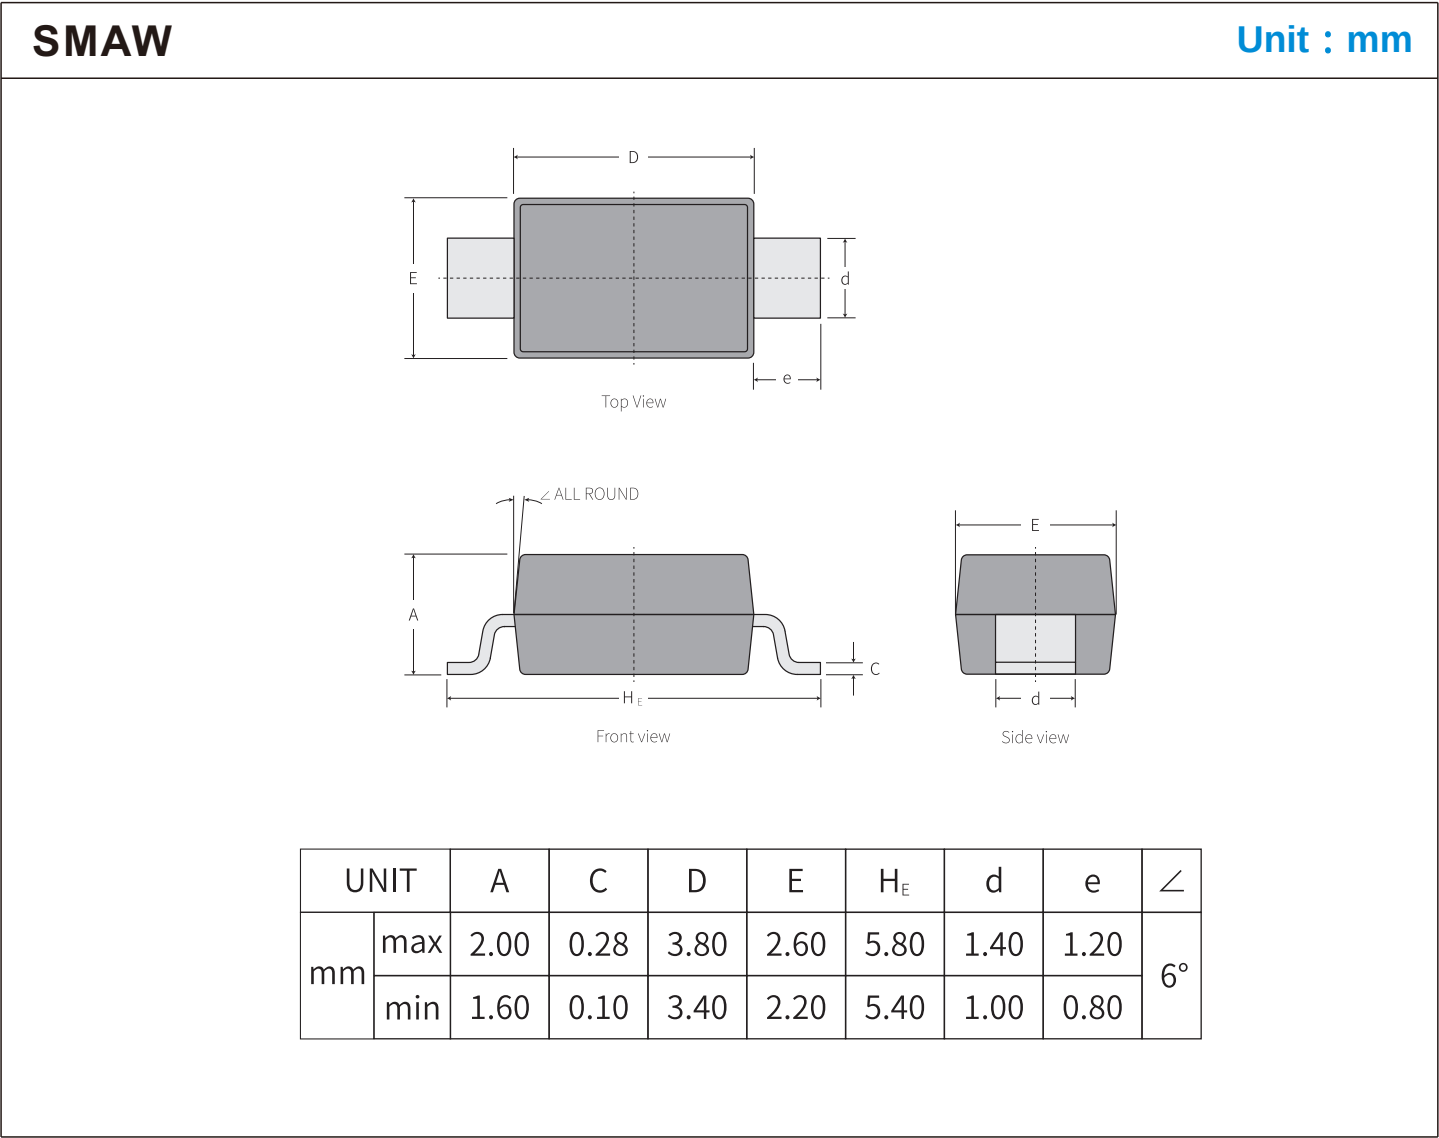

Suggested Pad Layout

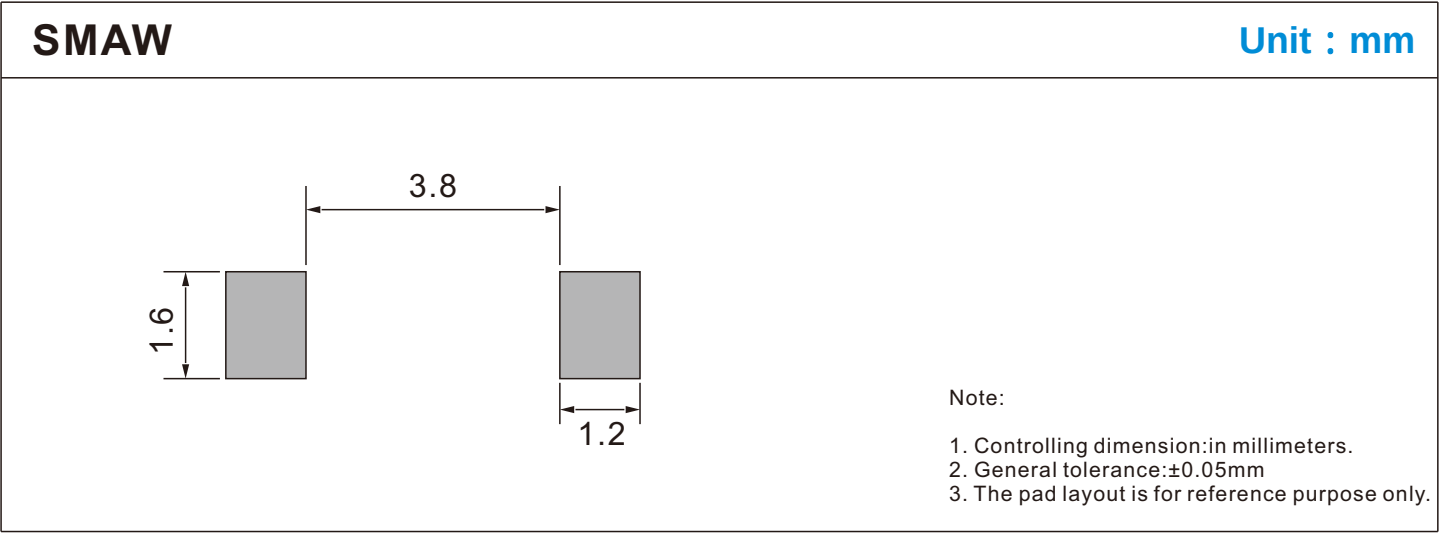




RHU2AW THRU RHU2MW

Surface Mount Ultrafast Recovery Rectifier

Carrier Tape Dimensions

Unit : mm


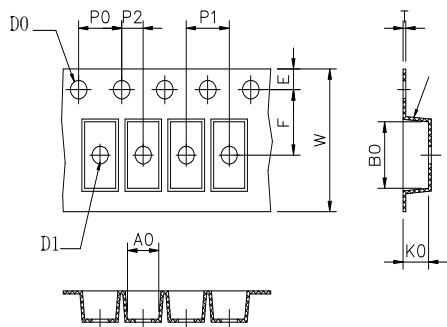


Symbol	Spec	Symbol	Spec
W	12.00±0.10	P1	4.00±0.10
E	1.75±0.10	P2	2.00±0.05
F	5.50±0.05	T	0.25±0.02
D0	1.55±0.05	A0	2.60±0.10
D1	1.50±0.10	B0	5.70±0.10
P0	4.00±0.10	K0	2.00±0.05

Reel Dimensions

Unit : mm


13" Reel



D5	Φ330.0±2.0
D6	Φ13.5±0.5
H	2.5±1.0
W2	12±2.0


Quantity: 8000PCS

Packaging




SMAW

8000PCS/Reel



5Reel/Inner Box
40KPCS/Inner Box



Dim(Unit:mm)
340mm*340mm*85mm

Dim(Unit:mm)
360mm*360mm*355mm




4 Boxes per carton
160KPCS per carton

13 inches Reel



Recommended Soldering Conditions

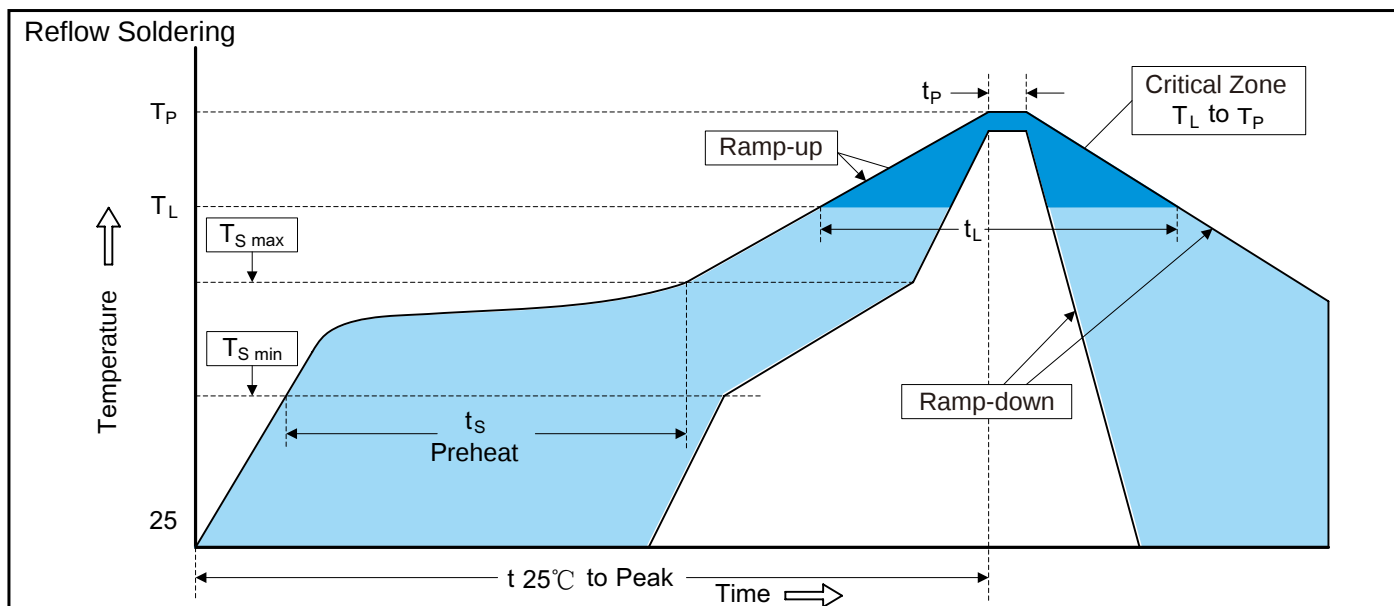

Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	3°C/second max.
Preheat	
-Temperature Min ($T_{S\ min}$)	150°C
-Temperature Max ($T_{S\ max}$)	200°C
-Time (min to max) (t_s)	60-180 seconds
$T_{S\ max}$ to T_L	
-Ramp-up Rate	3°C/second max.
Time maintained above:	
-Temperature (T_L)	217°C
-Time (t_L)	60-150 seconds
Peak Temperature (T_P)	260°C
Time within 5°C of actual Peak Temperature (t_p)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.