




RHE3AM THRU RHE3JM

Surface Mount Superfast Recovery Rectifier

Features

- Top-side Cooling(TSC) Packaging technology
- Compact and Slim Packaging Solutions
- Superfast reverse recovery time
- For surface mounted applications
- Low reverse leakage
- High forward surge current capability
- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Meets MSL level 1, per J-STD-020
- Lead free in comply with EU RoHS 2011/65/EU directives



Mechanical Data

- Case: SMHM
- Terminals: Solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end

Ordering Information

Part Number	Shipping	Reel
RHE3AM THR RHE3JM	15000PCS Tape&Reel	13 inches

Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	RHE3AM	RHE3BM	RHE3CM	RHE3DM	RHE3EM	RHE3GM	RHE3JM	Unit
	Marking	E3A	E3B	E3C	E3D	E3E	E3G	E3J	
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	V
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	V
Maximum Average Forward Rectified Current at T _c = 125 °C	I _{F(AV)}	3							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I _{FSM}	90							A
Maximum Forward Voltage at 3 A	V _F	1				1.25		1.68	V
Maximum DC Reverse Current T _a = 25 °C at Rated DC Blocking Voltage T _a =125 °C	I _R	1 100							μA
Typical Junction Capacitance (Note1)	C _j	76				70		38	pF
Maximum Reverse Recovery Time (Note2)	t _{rr}	35							ns
Typical Thermal Resistance (Note3)	R _{θJA} R _{θJC}	61 7							°C/W
Operating and Storage Temperature Range	T _j , T _{stg}	-55 to +150							°C

Note: (1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

(2) Measured with $I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$, $t_{rr} = 0.25\text{ A}$.

(3) PCB mounted with 0.08" X 0.08" (2.0mm X 2.0 mm) copper pad areas.



Characteristics Curves

Fig.1 Maximum Average Forward Current Rating

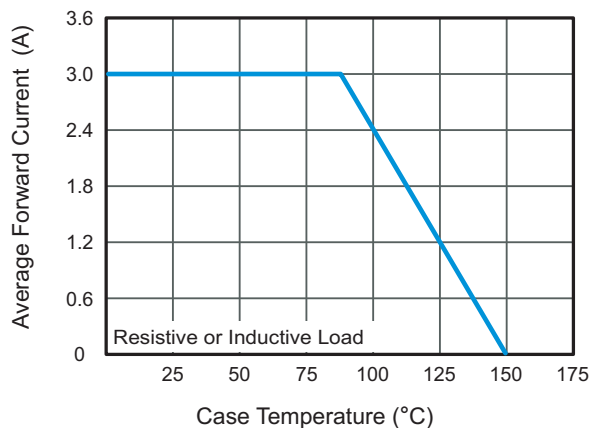


Fig.2 Typical Reverse Characteristics

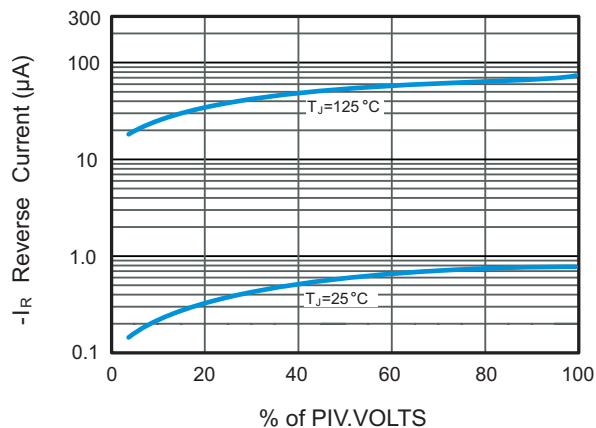


Fig.3 Typical Forward Characteristics

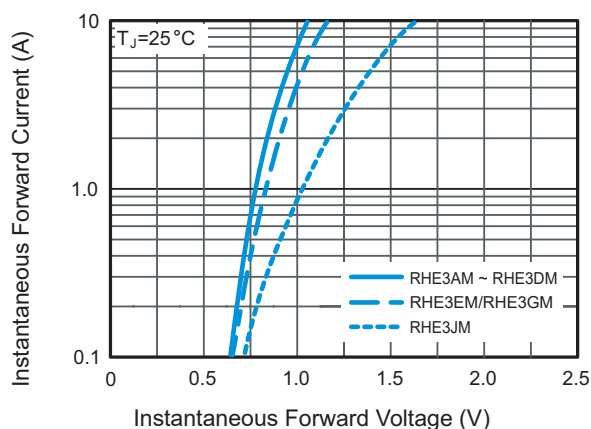


Fig.4 Typical Junction Capacitance


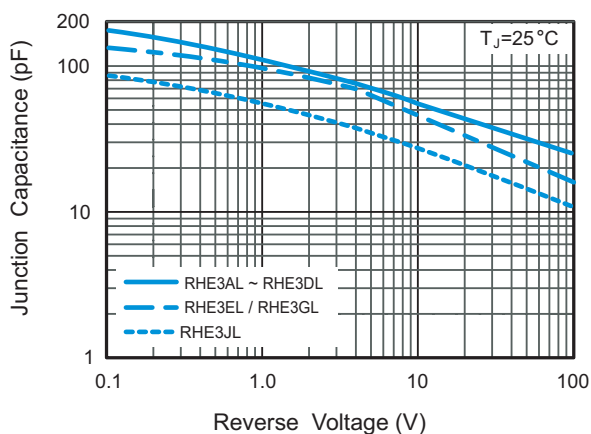


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current




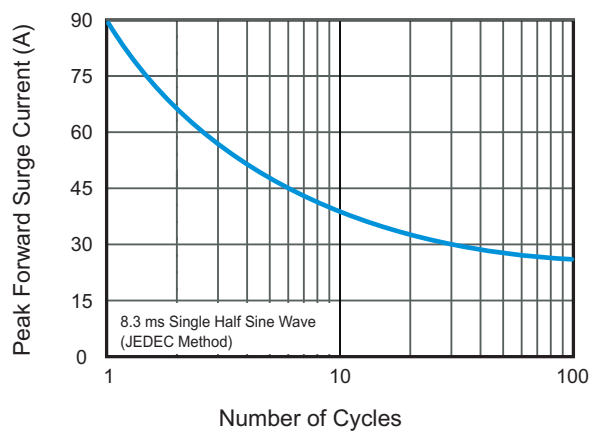

Package Outline

SMHM

Unit : mm

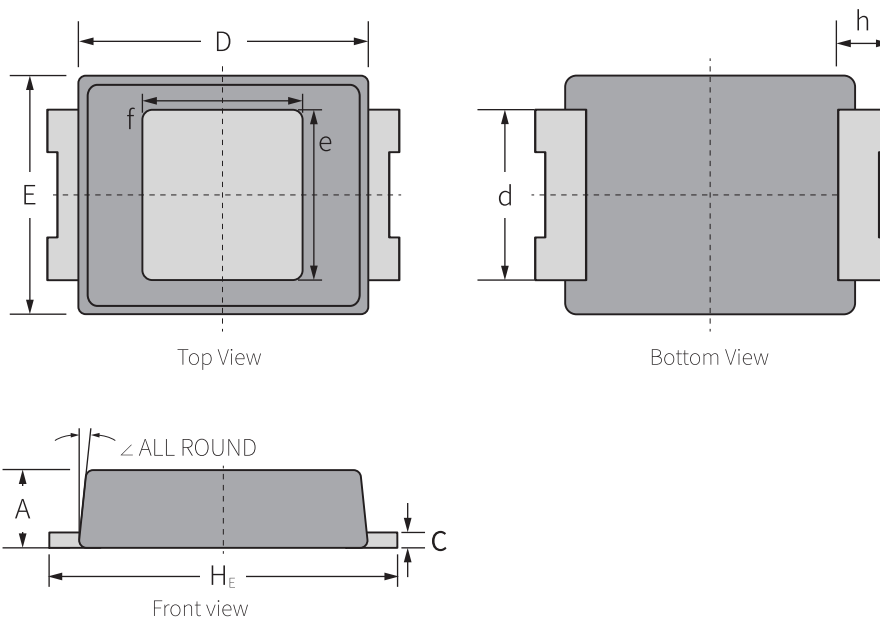


UNIT		A	C	D	E	H _E	d	e	f	h	∠
mm	max	0.99	0.25	3.60	3.00	4.30	2.10	2.10	2.00	0.70	6°
	min	0.83	0.15	3.20	2.60	3.70	1.90	1.90	1.78	0.50	

Suggested Pad Layout

SMHM

Unit : mm

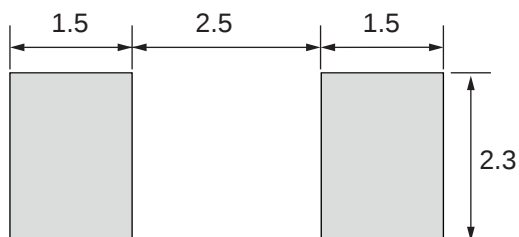

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purpose only.




RHE3AM THRU RHE3JM

Surface Mount Superfast Recovery Rectifier

Carrier Tape Dimensions

Unit : mm


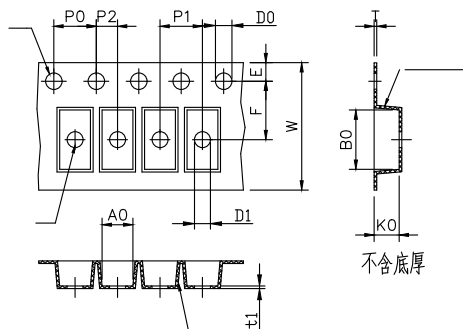


Symbol	Spec	Symbol	Spec
W	12.0±0.10	P2	2.00±0.10
E	1.75±0.10	t	0.25±0.03
F	5.50±0.10	t1	0.05+
D0	1.55±0.10	A0	3.85±0.10
D1	1.50±0.10	B0	5.15±0.10
P0	4.00±0.10	K0	1.20±0.10
P1	8.00±0.10		

Reel Dimensions

Unit : mm

13" Reel




D5	Φ330.0±5.0
D6	Φ13.5±0.5
H	2.5±1.0
W2	12±2.0
Quantity: 15000PCS	


Packaging



15000 PCS/Reel



5 Reel/Inner Box
75 KPCS/Inner Box



Dim(Unit:mm)
340mm*340mm*85mm

Dim(Unit:mm)
360mm*360mm*355mm




4 Boxes per carton
300 KPCS per carton

13 inches Reel



Recommended Soldering Conditions

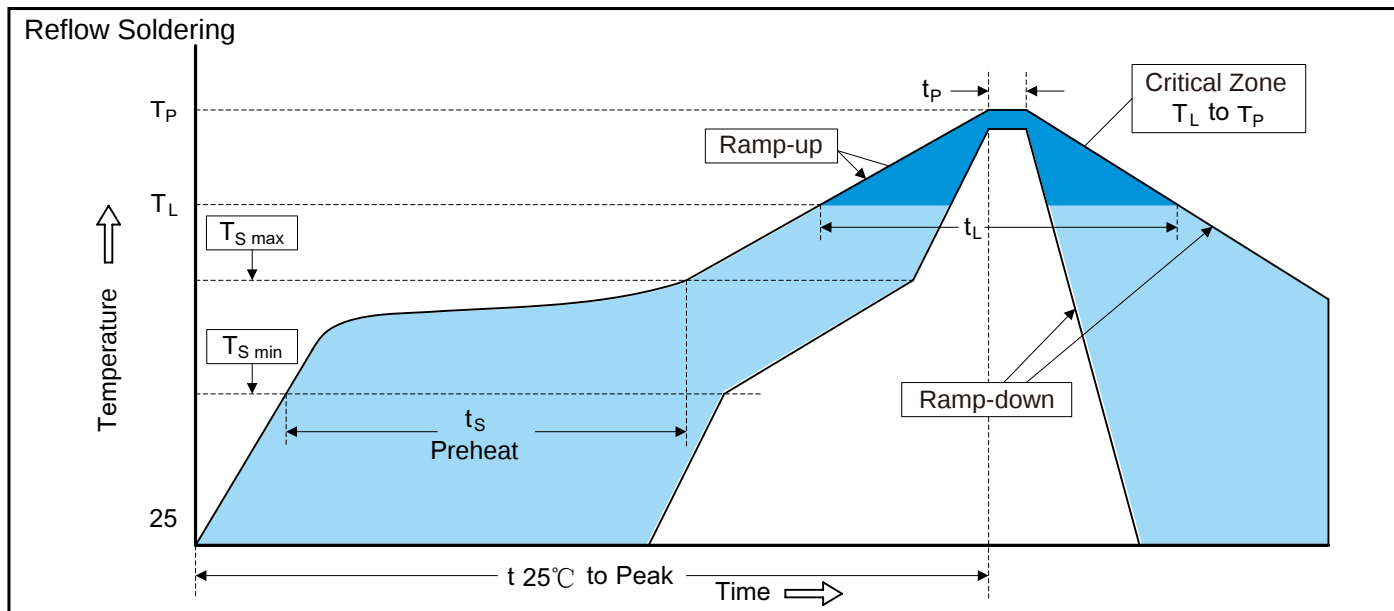

Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T _L to T _P)	3°C/second max.
Preheat	
-Temperature Min (T _{S min})	150°C
-Temperature Max (T _{S max})	200°C
-Time (min to max) (t _s)	60-180 seconds
T _{S max} to T _L	
-Ramp-up Rate	3°C/second max.
Time maintained above:	
-Temperature (T _L)	217°C
-Time (t _L)	60-150 seconds
Peak Temperature (T _P)	260°C
Time within 5°C of actual Peak Temperature (t _p)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.