




Features

- Top-side Cooling(TSC) Packaging technology
- Compact and Slim Packaging Solutions
- For surface mounted applications
- Low reverse leakage
- High forward surge current capability
- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Meets MSL level 1, per J-STD-020
- Lead free in comply with EU RoHS 2011/65/EU directives



Mechanical Data

- Case:SMHM
- Terminal:Leads solderable per MIL-STD-750 Method 2026
- Polarity:Color band denotes cathode end
- Mounting Position:Any

Ordering Information

Part Number	Shipping	Reel
RHS3MM	15000PCS Tape&Reel	13 inches

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

Parameter	Symbol	RHS3MM	Unit
	Marking	S3M	
Maximum repetitive peak reverse voltage	V_{RRM}	1000	V
Maximum RMS voltage	V_{RMS}	700	V
Maximum DC blocking voltage	V_{DC}	1000	V
Maximum average forward rectified current at $T_L=55^{\circ}C$	$I_{(AV)}$	3	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	90	A
Maximum instantaneous forward voltage at 3A	V_F	1.05	V
Maximum DC reverse current $T_A=25^{\circ}C$ at rated DC blocking voltage $T_A=125^{\circ}C$	I_R	1 100	μA
Typical Junction Capacitance (Note1)	C_J	25	pF
Typical thermal resistance (Note2)	$R_{\theta JA}$ $R_{\theta JC}$	59 6	$^{\circ}C/W$
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150	$^{\circ}C$

Note: (1) Measured at 1MHz and applied reverse voltage of 4.0V D.C.

(2) PCB mounted with 0.08"x0.08"(2mmx2mm) copper pad areas.



Characteristics Curves

Fig.1 Forward Current Derating Curve

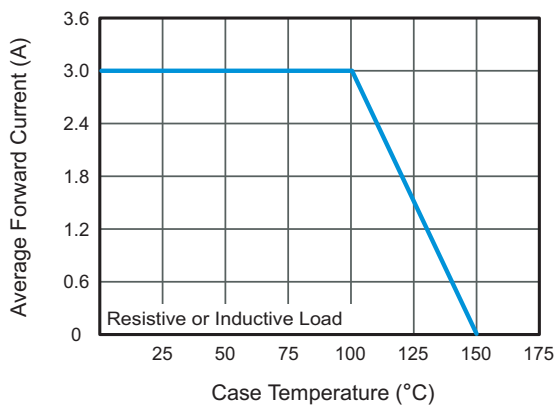


Fig.2 Typical Instantaneous Reverse Characteristics

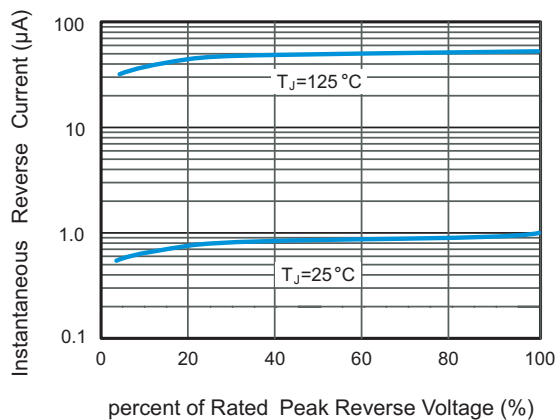


Fig.3 Typical Forward Characteristic

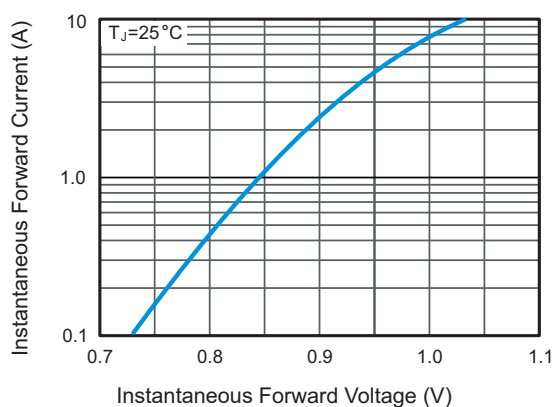


Fig.4 Typical Junction Capacitance



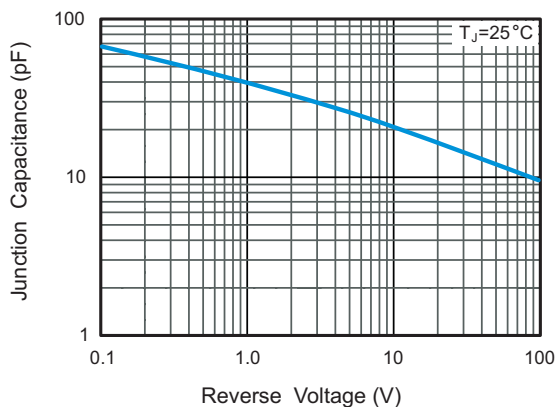


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

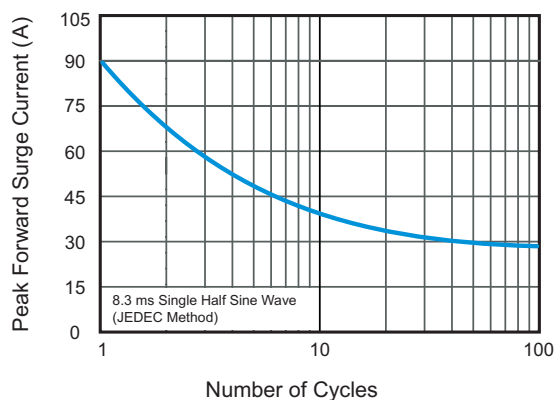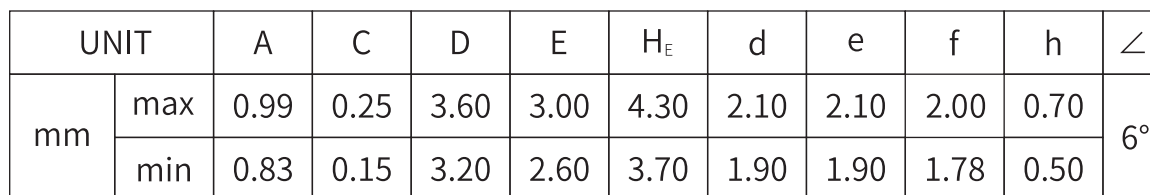


**SMHM**

Unit : mm

**SMHM**


Unit : mm





Carrier Tape Dimensions

Unit : mm


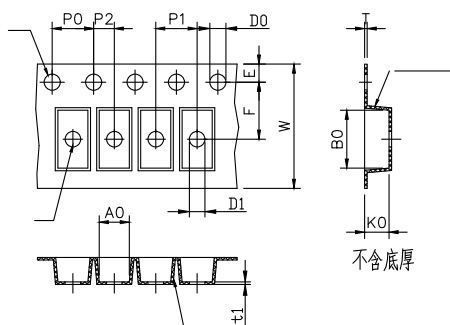


Symbol	Spec	Symbol	Spec
W	12.0±0.10	P2	2.00±0.10
E	1.75±0.10	t	0.25±0.03
F	5.50±0.10	t1	0.05+
D0	1.55±0.10	A0	3.05±0.10
D1	1.50±0.10	B0	4.15±0.10
P0	4.00±0.10	K0	1.15±0.10
P1	4.00±0.10		

Reel Dimensions

Unit : mm

13" Reel




D5	Φ330.0±5.0
D6	Φ13.5±0.5
H	2.5±1.0
W2	12±2.0
Quantity: 15000PCS	


Packaging



15000 PCS/Reel




5 Reel/Inner Box
75 KPCS/Inner Box



Dim(Unit:mm)
340mm*340mm*85mm

Dim(Unit:mm)
360mm*360mm*355mm



4 Boxes per carton
300 KPCS per carton

13 inches Reel



Recommended Soldering Conditions



Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	3°C/second max.
Preheat -Temperature Min ($T_{S\ min}$) -Temperature Max ($T_{S\ max}$) -Time (min to max) (t_s)	150°C 200°C 60-180 seconds
$T_{S\ max}$ to T_L -Ramp-up Rate	3°C/second max.
Time maintained above: -Temperature (T_L) -Time (t_L)	217°C 60-150 seconds
Peak Temperature (T_P)	260°C
Time within 5°C of actual Peak Temperature (t_p)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.